

Linear Graphic and Literature post


A linear graphic and literature post, great for demonstration and exhibition environments, an ideal solution for displaying information



Graphics are not supplied

features & benefits

- Portable and easy to assemble
- Anodised aluminium construction
- Available with 50mm round post
- 450mm dia steel dome bases supplied as standard
- Supplied with 3 adjustable A4 leaflet holders
- Overall assembled size
2060mm (h) x 523mm (w) x 450mm (d) approx



Pocket depth:
20mm approx
(weight 1.5kg approx)

Vertical position and angle of the leaflet holder can be adjusted



450mm dia Steel dome
(weight 7.5kg approx)
Recommended carry bag: LPB



Extra weight for dome base
(weight 9kg approx)

hardware & graphic specifications

Hardware dimensions (mm):

2060mm (h) x 523mm (w) x 450mm (d) approx

Recommended graphic substrates:

5mm thick foam board (supplied separately)

Recommended graphic size (mm)

1600mm (h) x 500mm (w) x 5mm (d)

Recommended accessories

Recommended carry bags:

AB293 and AB910

Assembly Instructions

Linear Graphic and Literature post includes:



450mm dia Steel dome base & M10 bolt
(weight 6kg approx)



Male post x 1
(weight 1kg approx)




Allen key set



Multi-angle Fixing x 3



Leaflet holder kit x 3
(weight 4.5kg approx)



Female post x 1
(weight 1kg approx)



PVC clear washer x 1



Brass Insert (rail Fixing) x 3




Attach leaflet holder to the post. Slide flat bar of holder into the channel of linear post.

Ensure thumb fastener threads are flush to the flat bar.

Position & angle holder to suit, tighten both thumb fasteners to secure the holder to the post. Repeat step for remaining holders.



To attach the stand off's, place the rail fixing into the channel on the linear post and twist the bottom section off the stand off until securely in place. Place the graphic into place within the stand off and tighten grub screw.

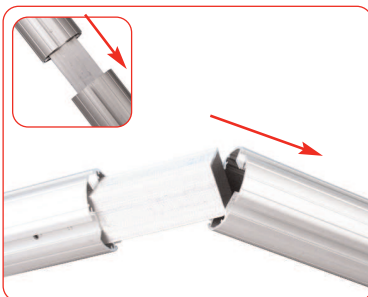

Align and slide female post over male post.



Attach base to male post using M10 bolt and allen key. Ensure clear washer is between base & post

